




<https://www.elidthailand.com>



APTK322

SWING GATE APTK322

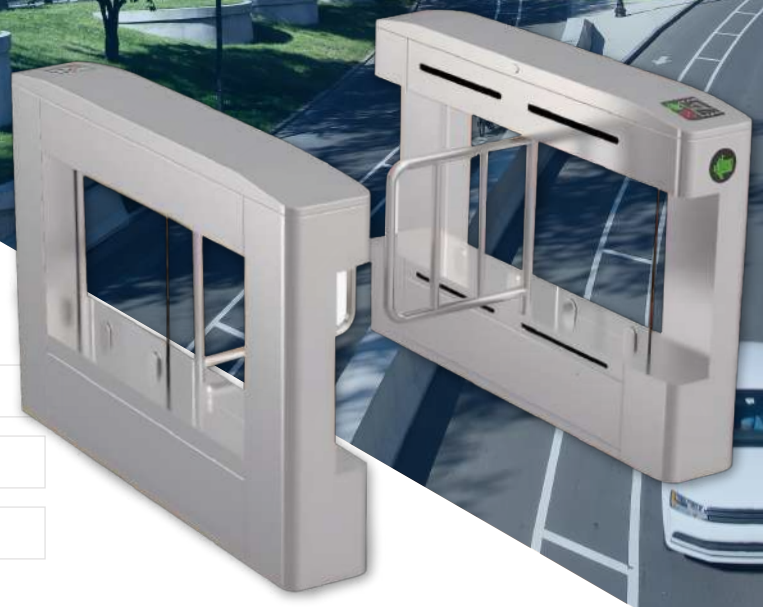



- ◆ Display screen: 7.0 inches
- ◆ Support live detection
- ◆ Wide Dynamic Camera
- ◆ Support 5000/10000 face database
- ◆ Recognition speed:250ms
Recognition rate≥97%
- ◆ Support Wigan signal output
- ◆ Communication mode TCP/IP

Face recognition device
(panel)/DF101



- ◆ Display screen: 5.0 inches
- ◆ Support live detection
- ◆ Support 5000/10000 face database
- ◆ Recognition speed:250ms
Recognition rate≥97%
- ◆ Support Wigan signal output
- ◆ Communication mode TCP/IP

Face recognition device
(column)/DF102

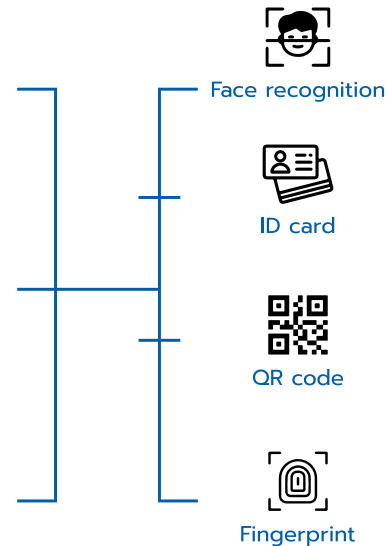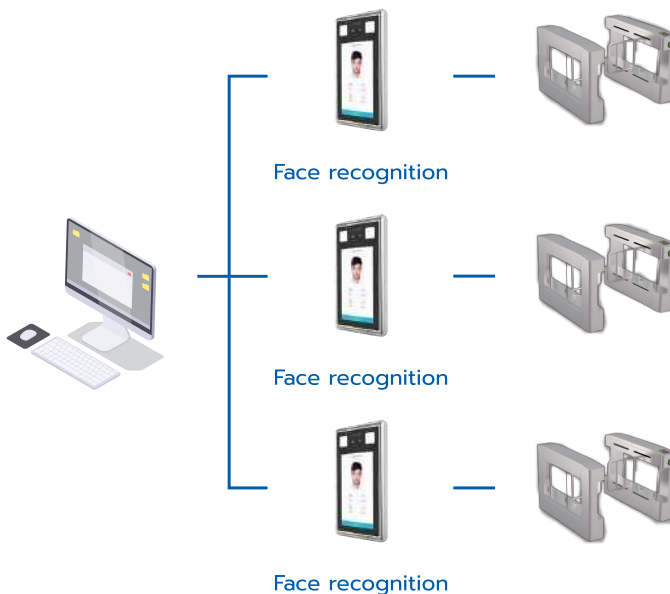

PRODUCT MECHANISM

- Reasonable and reliable design, low noise, smooth operation and long service life;
- With function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- With function of anti-tail, anti-reverse pass and so on;
- Card can be set "with memory" or "without memory" function;
- With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- With infrared anti-clip function (anti-clip when gate is open or running);
- Compatible with IC, ID card, scanning and face recognition, etc.
- Two modes of operation are available: open or closes.
- Various working modes are available, including two-way card reading and one-way card reading, etc.

TECHNICAL SPECIFICATION

PARTICULARS	DESCRIPTION
Material	1.2/1.5mm SUS304
Size	1400x250x980mm
Sensor pairs	5
Pass rate	35p/m
Pass width	600~1100mm
Input voltage	100V~240V
Motor type	24V DC brush motor
Environment	-20~+70°C
Motor power	35W
Input signal	Dry contract/RS485

PRODUCT SIZE

